SPECIFICATIONS

AKCV35

CENTRAL VACUUMS

CENTRAL VACUUM POWER UNIT

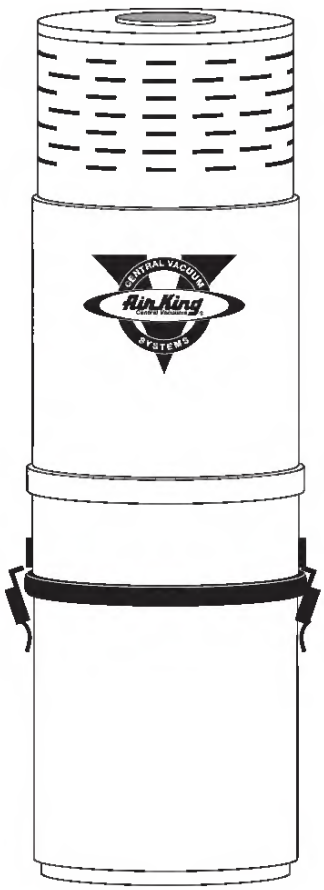

- **Motor**
  Two stage 120 volt, double ball bearing with tangential bypass discharge and thermoset fan end bracket. 11.7 amps.
- **Power Unit Body**
  Durable textured powder coated all steel body.
- **Performance**
  CFM at 2" opening: 112
  Water Lift: 107"
  Air Watts: 404
- **Collection**
  5 Gallon Bagged or Bagless collection canister with maintenance free single ply Micro-Tex® polyester fiber filter.
- **Recommended Home Size**
  Homes up to 3,000 square feet.
- **Mounting**
  Includes metal mounting bracket and an extra utility inlet.
- **Shipping Information**
  UPC: 0-83162-
  Shipping Weight: lbs.

PROJECT		ARCHITECT		
LOCATION		ENGINEER		
CONTRACTOR		SUBMITTED BY		DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Dntario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 4-07

Downloaded from www.Manualslib.com manuals search engine